



ELEVATION FROM INSIDE

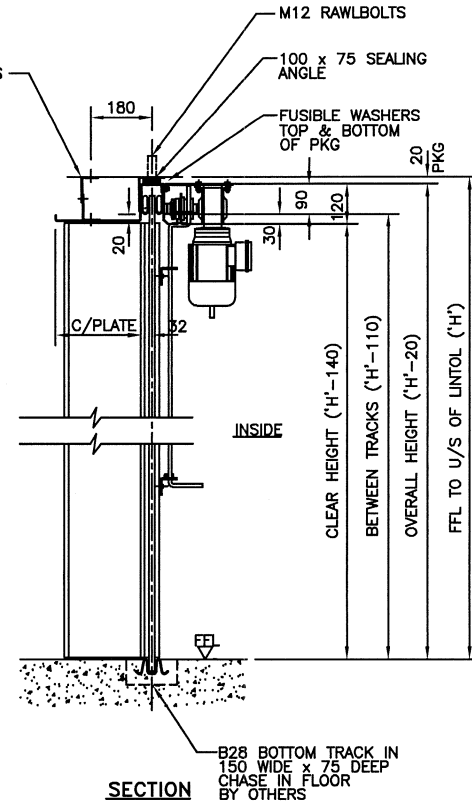

SECTION

- NOTES**
- STRUCTURAL**  
IT IS THE CLIENTS RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR/PRODUCT WEIGHT WHILST AT REST AND DURING OPERATION  
APPROX DOOR WEIGHT = Kg
  - BUILDERS WORK**  
CLIENT TO PROVIDE 150 WIDE x 75 DEEP CHASE IN FLOOR FOR BOTTOM TRACK & MAKE GOOD AFTER INSTALLATION
  - ELECTRICAL SUPPLY**  
415V 3PH + NEUTRAL 50HZ 10A SUPPLY - CLIENT TO PROVIDE A LOCKABLE ISOLATOR WITHIN 1 METRE OF THE MOTOR POSITION  
CLIENT TO PROVIDE A MAINTAINED SUPPLY, TO ENSURE THE DOOR IS CLOSED UNDER POWER.
  - LOCKING**
  - FINISH**

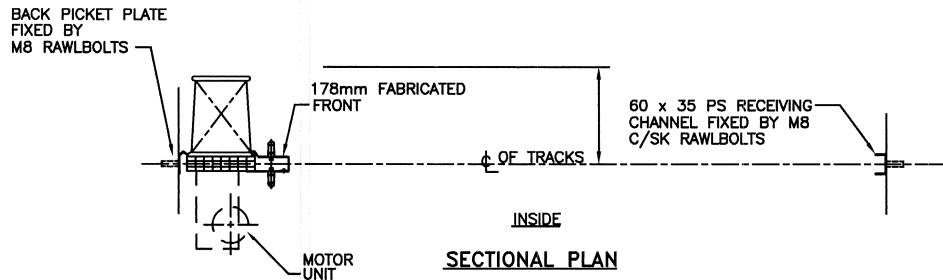

SECTIONAL PLAN

	Bolton Gate Co. Limited Waterloo Street Bolton. BL1 2SP Telephone: 01204 871000 Facsimile: 01204 871049	TITLE	DETAILS OF 4 HR F.R. ELECTRICALLY OPERATED EUROFOLD DOOR (RH) (OVER 3m x 3m, UP TO 5m x 5m)				C		F	DRAWN:	WORKS ORDER No
		SITE			A		D	CHECKED:	DRAWING NUMBER		
		DATE	REVISION	REF	DATE	REVISION	REF	SCALE:		1:15	