
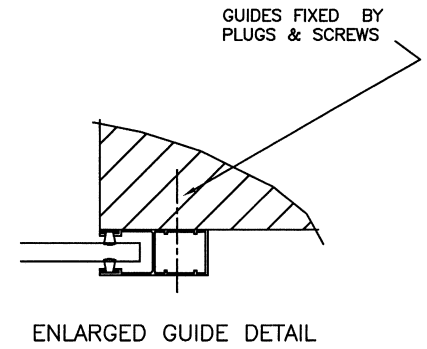
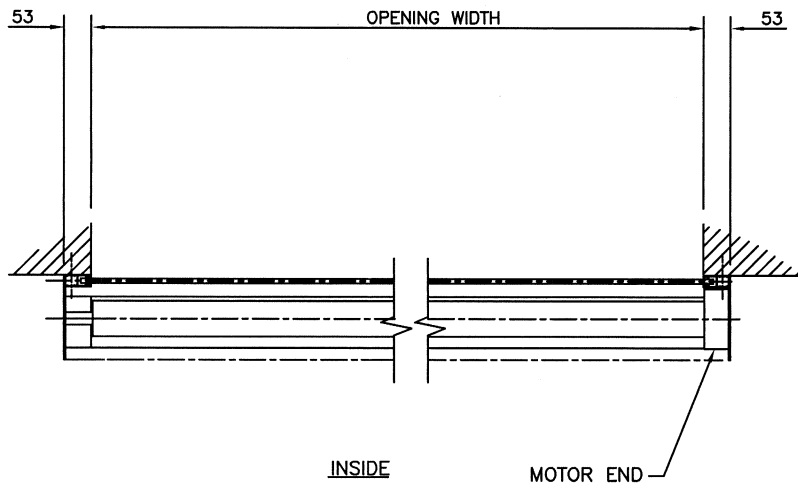
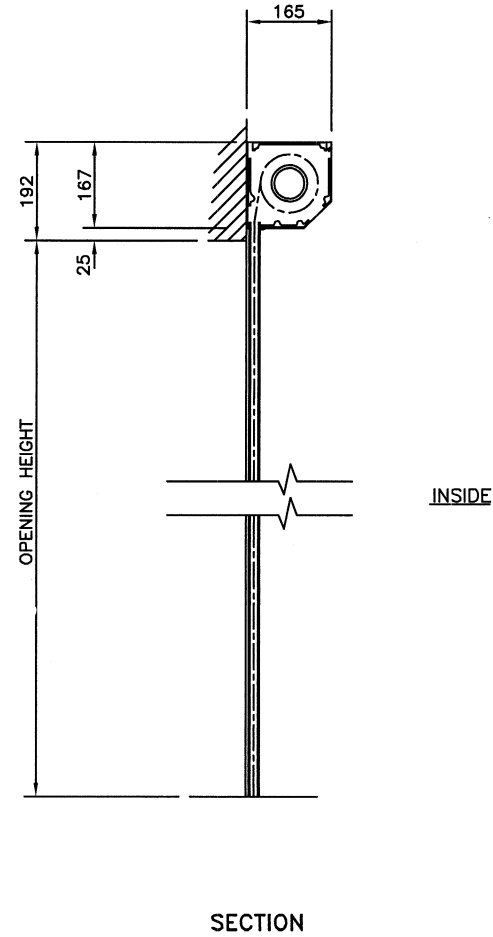


**NOTES**

1. IT IS THE CLIENTS RESPONSIBILITY TO ENSURE THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR / PRODUCT WEIGHT WHILST AT REST AND DURING OPERATION  
APPROX. DOOR WEIGHT = — Kg
2. ELECTRICAL OPERATION BY TUBULAR MOTOR TO SUIT A 240V 1PH SUPPLY CONNECTED TO A 13 AMP SOCKET TO BE POSITIONED WITHIN 1 METRE OF THE MOTOR BY OTHERS
3. EMERGENCY LOW LEVEL HAND CRANK FOR USE IN THE EVENT OF POWER FAILURE (ONE WINDING HANDLE SUPPLIED PER CONTRACT).
4. OPERATION BY LOW LEVEL ROCKER SWITCH FITTED ON RH SIDE LOOKING FROM INSIDE
5. FINISH: STANDARD WHITE

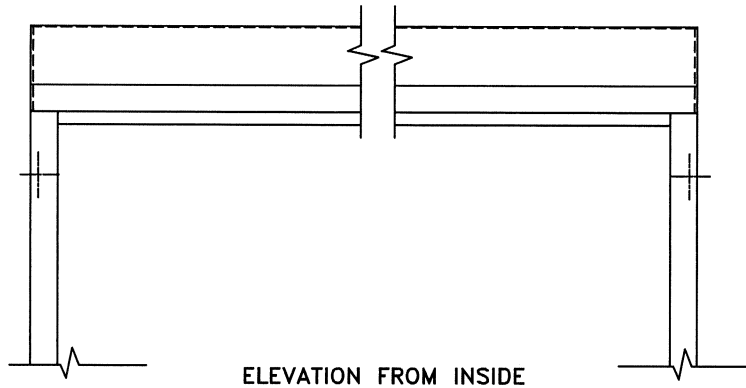

Bolton Gate Co. Limited  
 Waterloo Street  
 Bolton. BL1 2SP  
 Telephone: 01204 871000  
 Facsimile: 01204 871049

TITLE	ARRANGEMENT OF 1 No ELECTRICALLY OPERATED SECURIGUARD ROLLER SHUTTER 41mm ALUMINIUM LATHS (TUBE MOTOR)				C		F	DRAWN:	WORKS ORDER No
					B		E	DATE:	
SITE					A		D	CHECKED:	DRAWING NUMBER
					REF	DATE	REF	SCALE:	
DATE	REVISION	REF	DATE	REVISION	REF	SCALE:	1:10		